

SafePace 100 Driver Feedback Radar Speed Sign

General Description

The SafePace 100 driver feedback sign is the solution that fits your budget. This compact radar speed sign offers exceptional visibility and power efficiency in a lightweight and portable solution. Featuring the options you need at remarkably affordable pricing, the SafePace 100 driver feedback sign will help you keep your neighborhoods safe for years to come.

Features

- Energy Efficient: The sign can function up to 3 weeks autonomously with optional battery power depending on traffic volume.
- Optimal Visibility: Unique light enhancing, anti-glare lens system, as well as automatic ambient light adjustment, provide brilliant visibility even in poor lighting conditions.
- User Friendly: Software interface is user friendly and can be programmed to set sign parameters quickly and easily. Optional data collection allows you to download traffic data, and generate statistical reports.
- High strength aluminum sign face and individual optical lenses to **protect** against vandalism and theft
- **Stealth Mode:** Baseline traffic data can be collected for comparison and analysis while speed display appears blank to motorists.
- Speed Violator Strobe: Programmable flashing strobe alerts drivers to slow down when they exceed the threshold speed you choose.
- Universal Mounting: Optional mounting brackets let you use one sign at multiple locations with the turn of a key.
- Superior construction and durability for long-lasting performance.










Choice of faceplate colors available.

SafePace 100 Specifications

Digit Size	11"
Height	29"
Weight	21 lb.
24/7, 365 Scheduling	$\sqrt{}$
Data Collection	$\sqrt{}$
Solar Compatibility	V
Battery Operated	$\sqrt{}$
Universal Mounting	$\sqrt{}$
Cloud Compatibility	V
Trailer Compatibility	V
Dolly Compatibility	V
Hitch Compatibility	
Warranty	2 Years



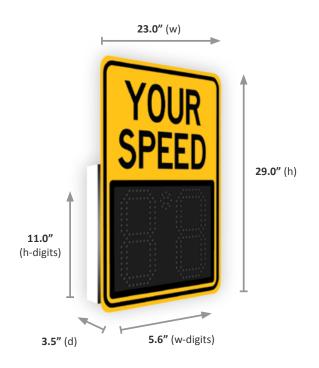

Feature	Specifications	
Dimensions		
Digits	11"(h) x 5.6"(w), 98 LEDs per digit	
Unit with "YOUR SPEED" Sign Mounted	Full size sign: 29.0"(h) x 23.0"(w) x 3.5"(d)	
Sign Weight (includes "YOUR SPEED" sign (2 lb.) mounted)		
AC Powered	21 lb.	
4 Cell Battery Powered Model	25 lb.	
Solar Powered Model	23 lb. (not including solar panel or bracket)	
General Specifications		
Operating Temperatures F° (C°)	-40° (-40°) to 185° (85°)	
Speed Units	Miles per hour (mph) or kilometers per hour (km/h)	
Faceplate	Yellow or white high-intensity prismatic reflective sheeting on sign face with black colored text. MUTCD approved colors and format.	
Bashplate	Aluminum, 0.25"	
Communications	Bluetooth (standard), GSM/GPRS (optional, for use with SafePace Cloud)	
Programming	SafePace Pro sign management software, SafePace Cloud remote sign management, 24/7 365 day unlimited programming and scheduling	

Feature	Specifications	
	Specifications ons (Electrical Specifications)	
•	100~240 V AC	
AC Power Input	100 210 1710	
DC Power Input	12 V DC	
Solar Panel Options	20W, 50W	
Radar		
Strobe	Dual Strobe and Single Strobe	
Internal	SS300 Doppler (FCC approved)	
Radar RF Out	5 mW maximum	
Radar F-center	24.125 GHz or 24.200 GHz	
Pickup Distance	Up to 300 feet	
Beam	24° (vertical) x 12° (horizontal), linear polarization	
CE Mark	Yes	
Display		
LEDs	208	
Digits	196 Amber, 23°, 5 mm, luminous intensity (5,000 – 12,000 mcd/LED)	
Speed Violator Strobes	12 White, 15°, 5 mm, luminous intensity (18,000 – 28,000 mcd/LED)	
Optical Lenses	208	
Ambient Light Sensors	1 sensor and automatic brightness control	
Enclosure		
Construction	12 gauge aluminum, flat black powder coated front for reduced glare and maximum contrast; light gray powder coated body to minimize heat absorption	
	Weatherproof, NEMA 4X-12, IP65 level	
Weatherproof Rating	compliant. Non-sealed and ventilated.	
Weatherproof Rating		
Weatherproof Rating Sign	compliant. Non-sealed and ventilated.	

+1.916.394.2809 Fax

^{+1.888.446.9255} USA

^{+1.916.394.9884} Worldwide