



Traffic Safety Corporation
 2708 47th Ave.
 Sacramento, CA 95822-3806
 Toll Free: 888.446.9255
 Tel: 916.394.9884
 Email: sales@xwalk.com
 Web: www.xwalk.com

TS-SR-BALI-LF Flexible Bollard

Features

- Flexible bollard bounces back and returns to original position after impacts.
- Ideal for area delimitation and road delineation.
- Resistant to light and heavy vehicles.
- UV protection for greater durability.
- 3M reflective tape with high reflectivity for greater visibility at night.
- Reflective band with two rows of glass elements on base.
- Many color options for a wide variety of applications.
- Easy installation.



Mechanical Features

- Main Body/Base Material: PU
- Fixation Screw: Galvanized Steel
- Anchor Material: Aluminum
- Main Body/Base Colors: Black, Grey (RAL 7040) and Green (other colors available by request)
- Reflective Tape: 3M Reflective Tape
- Reflective Tape Colors: White or Yellow
- Reflective Band with Glass Elements: Black with white crystals.



Reflective band with two rows of glass elements.



Bollards

	TS-SR-BALI-LF
Height	31.5" (800mm)
Diameter on Top	5.12" (130mm)
Diameter on Base	6.38" (162mm)
Weight	7.39 lb. (3.350 Kg)

Other dimensions available by request.

Anchors


	TS-SR-A6050
Height	2.36" (60mm)
Diameter	1.97" (50mm)
Material	Aluminum
Weight	.37 lb. (0.166 Kg)

Visit our web site: www.xwalk.com



Traffic Safety Corporation
2708 47th Ave.
Sacramento, CA 95822-3806
Toll Free: 888.446.9255
Tel: 916.394.9884
Email: sales@xwalk.com
Web: www.xwalk.com


TS-SR-BALI-LF Flexible Bollard

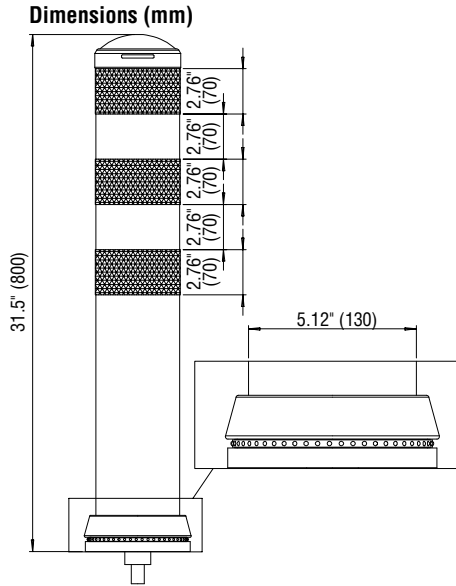

Installation Procedure



Personal protective equipment must be worn during installation process.

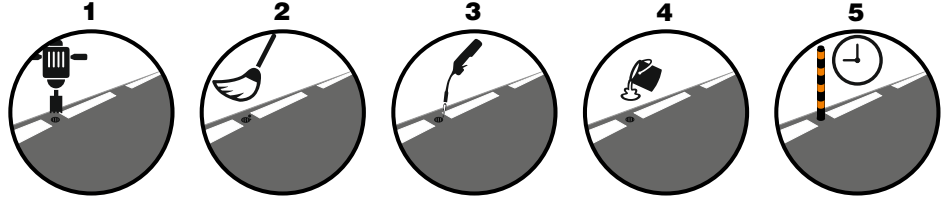

- 1** Drill a hole with 2.36" (60mm) diameter and 2.76" (70mm) depth.
- 2** Brush any debris or dust from the hole resulting from drilling.
- 3** Dry the hole with a blowtorch to remove any moisture that may compromise the adhesion and effectiveness of the glue.
- 4** Pour glue in the hole and insert the TS-SR-BALI. Remove any excess remaining of glue. Recommended glues: PATTEX TQ 500, Hilti HIT-HY 150 or Sika AnchorFix®-1
- 5** The glue drying time may change depending on weather conditions. Consult the glue data sheet for more information.

Changing or not completing the described installation process can result in suspension of warranty.

Visit our web site: www.xwalk.com