

Solar LED Semiflush Reflective Markers

Compliance

- IP68 Ingress Protection

Applications

Solar LED Semiflush Reflective Markers are used to delineate roadway curves, roundabouts, pedestrian paths, and school zones for visual recognition.






- Roadway curves & roundabouts
- School zones & mid-block crosswalks
- Pedestrian & bike paths
- Bridge toll booths: Lane guidance
- Freeway exit ramps: Wrong-way warning
- Parking lots: Directional & stop bars

Features

- Highly visible at night and under adverse weather conditions
- Semiflush snowplow-safe design
- Aluminum alloy fixture rated for 25 tons PSI
- High brightness LEDs (5mm diameter)
- Visible over 1/2 mile (800m) away
- Flashing or constant mode
- LEDs operate all night (dusk to dawn)
- Integrated reflective section enhances visibility
- IP68 water and dust resistant
- Maintenance free
- Designed to operate in extreme temperatures
- Easy installation with optional thermoplastic adhesive pad

Specifications

- Battery Type: Anti-heat NiMH (2.4V/600mA)
- Operating Hours: 24 to 30 hours after fully charged
- Battery Charge Time: 4 hours of sunlight
- Battery Lifespan: 3 to 5 years
- Solar Panel: Monocrystalline (4V/63mA)
- Mounting Surfaces: Asphalt, concrete, turf, or dirt
- Fixture Dimensions: 4" x 4" x .75" (102 x 102 x 20mm)

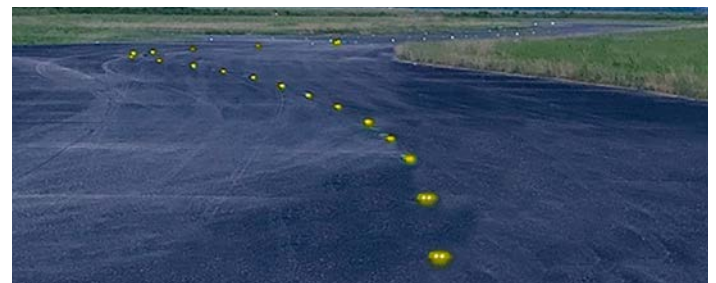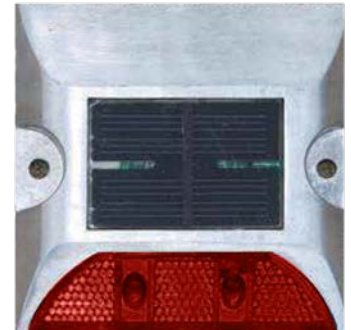

+1.888.446.9255 USA
+1.916.394.9884 Worldwide
+1.916.394.2809 Fax

xwalk.com
sales@xwalk.com

Traffic Safety Corp., 2708 47th Ave.
Sacramento, CA, 95822, USA

Product specifications may be subject to change without prior notice. Verify current specifications when ordering. © Traffic Safety Corp. | 3/15/2022

Thermoplastic Adhesive Pad Installation Instructions

The optional adhesive pads are a non-toxic, zero VOC, performance thermoplastic adhesive designed to adhere Solar LED Semiflush Reflective Markers to concrete or asphalt.

When heated with a propane heat torch, the pad liquefies and fuses with the surface and the marker, providing a bond that will last throughout the marker's lifetime.

Instructions:

- Wear gloves to ensure that you do not get the heated adhesive on your skin.
- Ensure that no moisture is present prior to positioning the pad on the pavement surface.
- Position the pad.
- Heat the pad to the melting point using propane burner.
- Position the Solar LED Semiflush Reflective Marker on top of the pad (material must completely surround the marker). The pad will seep up through the two holes on both sides of the marker as an indicator that the unit is secured to the ground.
- Apply slight pressure with your gloved hand on top of the marker to make sure it is firmly seated. Do not press the marker through to the surface of the road; rather leave a cushion of adhesive pad between the marker and the road surface.



Ordering Codes

Product Code	LED Color Combination (Side 1 / Side 2)
SL-L853T1	BB: Blue/Blue
	GG: Green/Green
	WW: White/White
	YY: Yellow/Yellow
	GY: Green/Yellow
	RG: Red/Green
	RW: Red/White
	RY: Red/Yellow
	BX: Blue/Blank
	GX: Green/Blank
	RX: Red/Blank
	WX: White/Blank
	YX: Yellow/Blank

